

USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader*).



SAFETY

The dispenser comes with a key lock.



DOSAGES

Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI* with TCP/IP protocol.



BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



WINE CARD

Chip card system.




GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations*.




SAFETY

The dispenser comes with a key lock.


SPACE REQUIREMENTS

*Optional

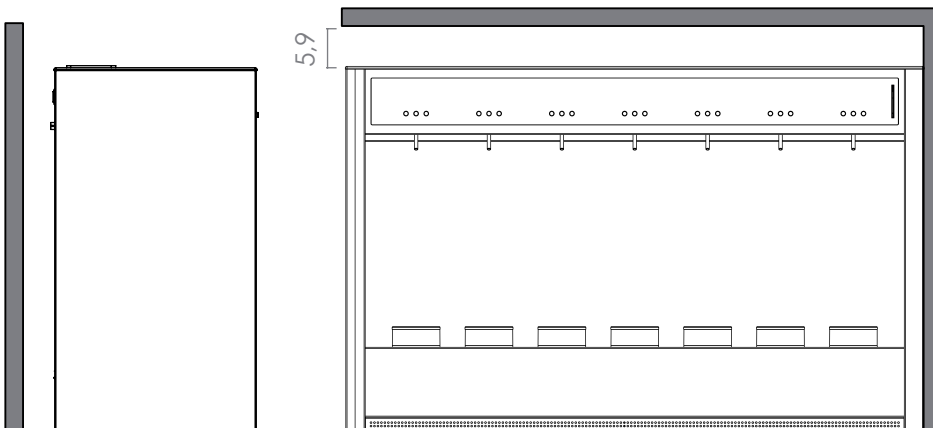

TECHNICAL SPECIFICATIONS

WIDTH	1001mm 39,44in
HEIGHT	632mm 24.9in
DEPTH	351mm 13.83in
WEIGHT RT	64kg 14lbs

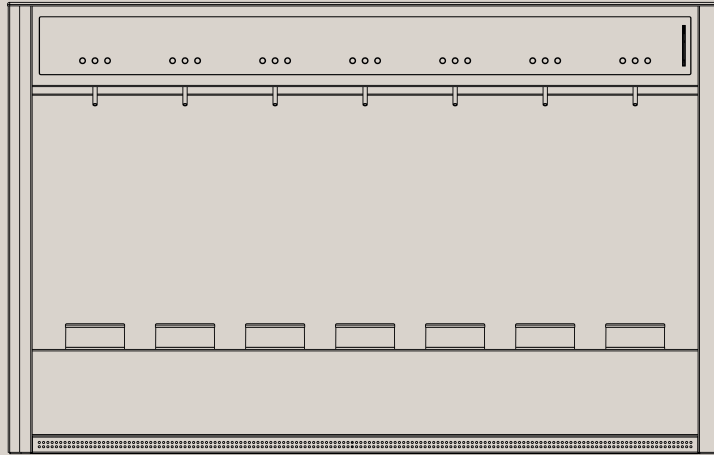

MODELS

DISPENSER	ORDER CODE	REFRIGERATION	ELECTRICAL REQUIREMENTS
BARTENDER - US & CANADA	S307700624201	NONE	100-240VAC 50/60HZ
BARTENDER - EU/WORLD	S307700634501	NONE	100-240VAC 50/60HZ

CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
 UL 751
 UL 541
 CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
 IEC 60335-1
 IEC 60335-2-75
 IEC 60335-2-24

